

# Resilient Flooring

FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS



## Durable

- Withstands diverse weight loads and temperatures
- Resists impacts and punctures
- Monolithic formulation eliminates wear layers, potentially lowering annual maintenance expenses



## Sustainable

- Crafted from more than 90% recycled materials
- Millions of pounds of vinyl waste diverted from landfills each year
- Earn credits with the U.S. Green Building Council



## Comfortable

- Designed to boost footing confidence in slip-prone areas
- Certified high-traction flooring by the National Floor Safety Institute
- 1/4-inch thickness reduces leg fatigue and absorbs sound




## Sanitary

- Resistant to mildew and bacterial growth, it's impervious to water absorption
- Remains non-corrosive when exposed to chemicals, animal fats or grease
- Withstands routine cleaning without the need for waxing or stripping.

## American Made. Made To Last.

For more than 30 years, Protect-All® has been producing our vinyl flooring right here in America. From concept to completion, we remain committed to providing you with high-quality, durable commercial flooring solutions designed to stand the test of time and backed by a 10-year warranty.

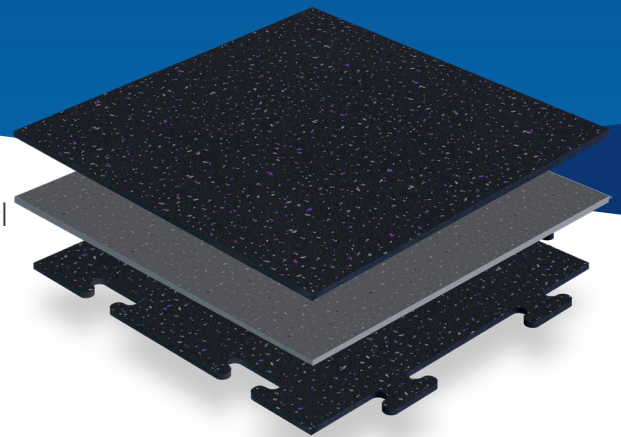

## Technical Data


	Test Method	Units	0.25 in.
<b>Weight</b>	ASTM D-751	oz./sf	25.16
<b>Dynamic Coefficient of Friction</b>	ANSI A326.3		0.56
<b>Coefficient of Friction*</b>	ASTM D-695	Dry	0.88
<b>Fire Test NFPA Type 1 Rated</b>			
Critical Radiant Flux	ASTM D-648	w/cm <sup>2</sup>	1.05
Burn Distance	ASTM D-648	cm	12
<b>Breaking Strength</b>	ASTM D-2047	lbs.	405 x 723
<b>Compressive Strength</b>	ASTM D-751	psi	641
<b>Elongation</b>	ASTM D-751	%	76.5 x 88.5
<b>Shore A Hardness</b>			80 - 85
<b>Tear Strength</b>	ASTM D-751	lbs.	76.5 x 84
<b>Bacteria and Mildew Resistance</b>	ASTM G-21		Pass
<b>Dimensional Stability</b>	ASTM F2199	%	0.1
<b>Resistance to Impact</b>	ASTM F1265		Pass

\*For matte flooring only

## Sizes

Protect-All flooring is available in five sizes and in thicknesses of 1/4" and 1/8". Protect-All Designer Series\* is only available in 1/4" thickness.

5' x 8' Sheets



5' x 5' Tile



2' x 2' Tile




5' x 30' Rolls




18" x 18" Interlocking Tiles


1/4" only




## Installation Systems




Heavy Duty Commercial



Commercial



Non-Welded



Loose Lay

- 1 Protect-All Flooring
- 2 Two-Part Adhesive

- 3 Protect-All Raid-Weld
- 4 Protect-All Cove Base

- 5 Drain Ring
- 6 Z-Bar

- 7 Standard Cove Base
- 8 Seam Sealer



For more information give us a call or visit our website today.

**800.544.9538**  
[protect-allflooring.com](http://protect-allflooring.com)

Manufactured by Oscoda Plastics® 5585 N. Huron Ave. | Oscoda, MI 48750



Oscoda Plastics is a brand owned by Holcim Solutions and Products US, LLC.  
 "Protect-All" and "Oscoda Plastics" are registered trademarks owned by Holcim Solutions and Products US, LLC.  
 OP080001 - ORG: 1.14 REV: 1.11.24